MODEL72 SIMPLEX BASKET STRAINER

Sizes 3/8" to 8" ● Iron, Bronze, Carbon Steel or Stainless Steel ● Threaded or Flanged



Features

- Quick open cover no tools needed
- Heavy wall construction
- Large capacity baskets
- Machined basket seat
- Threaded drain
- Perforated stainless basket

Options

- Basket perforations from 1/32" to 1/2"
- Basket mesh from 20 to 400
- Monel baskets
- Viton, PTFE-encapsulated, or EPDM seals
- Vent valves
- 1/4" NPT taps
- Magnetic basket inserts
- Pressure differential gauge and switch



he Eaton Model 72 Simplex Strainer has been the industry standard simplex basket strainer for over 75 years. It's perfect for industrial and commercial applications where the line can be temporarily shut down for strainer basket cleaning or changeout.

A reason for its popularity is the unusually large basket capacity. The free straining area is at least 6 times the cross sectional pipe area (even more in many sizes). No tools are needed to open the cover. The quick opening, swinging yoke can be disassembled and the basket removed in seconds. On sizes 4" and larger, a special cover clamp is provided to distribute the seating pressure and to insure positive seating of the cover.

Another feature is a threaded drain on every size strainer (fitted with a plug). This can be used as a backwash connection, if desired. Sizes 2" and larger are provided with legs for bolting to the floor for rock solid installation.

Wall thicknesses are exceptionally heavy. We have not stinted on weight to save material costs. The basket seats are precision machined to give a tight seal and prevent any material from by-passing the basket. The Eaton Model 72 Simplex Basket Strainer is a top quality, heavy duty unit designed to stand up to the most demanding of applications. There is simply no better simplex basket strainer made.

Model 72 Simplex

Size	Material	End Connection *	Seals	Pressure Rating		
3/8" to 3"	Iron and Bronze		Buna N			
1" to 3"	Carbon Steel	Threaded	Dulla IV			
	Stainless Steel		Viton®			
	Iron	Flanged 125#		200 psi @ 100F		
1″ to 8″	Bronze		Buna N			
1 10 6	Carbon Steel	Flanged 150#				
	Stainless Steel		Viton®			


* DIN flanges and BSP threads available


Mod. 72C_V Factors*

Size	Value	Size	Value		
3/8″	15.0	2″	73		
1/2″	15.0	2-1/2″	125		
3/4"	15.0	3″	180		
1″	22.5	4″	350		
1-1/4″	31.5	6″	900		
1-1/2″	46.0	8″	1400		

^{*} For water with clean, perforated basket

Technical Details

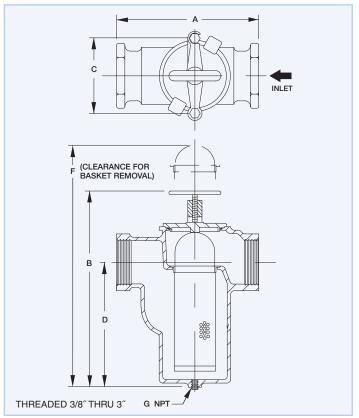

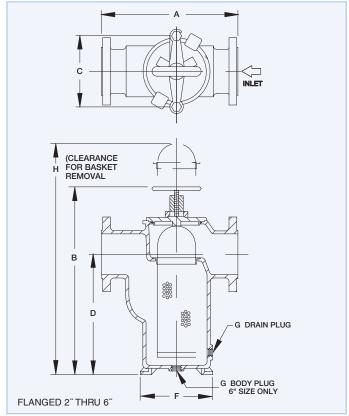

Dimensions and weights are for reference only. Contact us for certified drawings.

Threaded Model 72 Dimensions (in / mm)

				IIIIEaucu	i Widuci <i>i</i>	Z DIIIIGI	ו) פווטופו	1117 111111)				
										Net Wt Ib / kg		
Pipe Size	A	В	C	D	E	F	G	н	Bronze	Carbon Steel	Iron	Stainless Steel
3/8	4.00 / 102	6.63 / 168	2.88 / 73	4.00 / 102	2.38 / 60	11 / 279	3/8 / 10	-	4 / 1.8	_	4 / 1.8	-
1/2	4.00 / 102	6.63 / 168	2.88 / 73	4.00 / 102	2.38 / 60	11 / 279	3/8 / 10	-	4 / 1.8	_	4 / 1.8	-
3/4	5.38 / 137	8.38 / 213	4.00 / 102	5.00 / 127	3.06 / 78	13 / 330	1/2 / 15	-	8 / 3.6	_	7 / 3.2	-
1	5.38 / 137	8.38 / <mark>213</mark>	4.00 / 102	5.00 / 127	3.06 / 78	13 / 330	1/2 / 15	-	8 / 3.6	7 / 3.2	7 / 3.2	7 / 3.2
1-1/4	6.75 / 172	9.88 / 251	4.88 / 124	5.88 / 149	3.88 / 99	14 /356	1/2 / 15	-	13 / 6	_	12 / 6	-
1-1/2	7.25 / <mark>184</mark>	11.00 / 279	4.88 / 124	7.00 / 178	4.00 / 102	16 / 406	3/4 / 20	-	16 / 7	15 / 7	15 / <mark>7</mark>	16 / 7.3
2	8.75 / <mark>222</mark>	13.38 / 340	6.75 / <mark>172</mark>	7.63 / 194	5.13 / <mark>130</mark>	21 / 533	1-1/4 / 32	-	32 / 15	36 / <mark>16</mark>	28 / <mark>13</mark>	31 / 14
2-1/2	10.38 / 264	14.88 / 378	8.00 / 203	8.63 / <mark>219</mark>	6.38 / 162	26 / 660	1-1/2 / 40	-	49 / 22	52 / <mark>24</mark>	42 / 19	51 / <mark>23</mark>
3	11.50 / 292	17.75 / 468	8.00 / 203	11.38 / 298	6.63 / <mark>168</mark>	28 / 711	1-1/2 / 40	-	60 / <mark>27</mark>	60 / <mark>27</mark>	52 / <mark>23</mark>	60 / <mark>27</mark>
Flanged Model 72 Dimensions (in / mm)												
2	10.50 / <mark>268</mark>	13.75 / <mark>349</mark>	6.75 / <mark>172</mark>	7.63 / <mark>194</mark>	5.13 / <mark>130</mark>	6.25 / 159	3/8 / 10	20.00 / 508	49 / 22.3	36 / <mark>16</mark>	36.5 / <mark>17</mark>	36 / <mark>16</mark>
2-1/2	11.63 / 295	15.63 / <mark>397</mark>	8.00 / 203	8.88 / <mark>226</mark>	6.38 / 162	7.63 / 194	3/8 / 10	23.00 / <mark>584</mark>	64 / 29.1	63 / <mark>27</mark>	54 / <mark>25</mark>	63 / <mark>29</mark>
3	13.13 / 334	18.00 / 457	8.00 / 203	10.63 / <mark>270</mark>	6.50 / 165	8.00 / <mark>203</mark>	3/8 / 10	27.00 / <mark>686</mark>	85 / 38.6	-	76 / <mark>35</mark>	-
3	13.13 / 334	18.75 / <mark>476</mark>	7.94 / <mark>202</mark>	12.00 / <mark>305</mark>	6.50 / 165	8.00 / 203	1/2 / 15	27.00 / <mark>686</mark>	_	86 / <mark>39</mark>	-	86 / <mark>39</mark>
4	16.75 / <mark>425</mark>	19.88 / <mark>505</mark>	10.75 / <mark>273</mark>	10.75 / <mark>273</mark>	9.63 / <mark>245</mark>	11.38 / <mark>289</mark>	1/2 / 15	30.00 / <mark>762</mark>	140 / 63.6	-	125 / <mark>55</mark>	-
4	17.25 / 438	19.88 / 505	10.69 / <mark>272</mark>	10.69 / <mark>272</mark>	9.25 / <mark>235</mark>	11.38 / <mark>289</mark>	1/2 / 15	30.00 / 762	_	130 / <mark>59</mark>	-	130 / <mark>59</mark>
5	18.13 / <mark>461</mark>	25.13 / <mark>638</mark>	10.75 / <mark>273</mark>	15.25 / <mark>387</mark>	10.00 / 254	11.38 / <mark>289</mark>	1/2 / 15	41.00 / 1041	182 / 82.7	-	170 / <mark>775</mark>	-
6	19.63 / 499	28.50 / <mark>724</mark>	10.69 / 272	18.38 / 467	10.00 / 254	11.38 / <mark>289</mark>	1/2 / 15	46.00 / 1168	270 / 122.7	235 / 107	200 / 91	235 / 107
8	27.00 / 686	40.50 / 1029	-	27.00 / 686	13.75 / 349	17.50 / <mark>445</mark>	1/2 / 15	60.00 / 1524	600 / 272.7	550 / <mark>250</mark>	500 / <mark>227</mark>	550 / <mark>250</mark>